

Installation Products Catalog 2009

Surface Preparations * Mortars * Grouts * Sealers * Installation Tools
Adhesives * Seam Tape * Sundries * Metal Trim * Vinyl Trim * Underlayment



C-CURE

GUNDLACH
Quality Products Since 1927

PLI
PAK-LITE, INC.

Capitol
USA

Armada

AQUA MIX

ORCON
ORCON CORPORATION

DEWALT

TARGET

HARDIBACKER
1/4" CERAMIC TILE BACKERBOARD FOR FLOORS
AND COUNTERTOPS FROM JAMES HARDIE

Bolick Distributors

YOUR COMPLETE SOURCE FOR FLOORING INSTALLATION PRODUCTS



Customer Service 800-960-1209

The contents of this catalog represent a collection of the most 'in-demand' flooring installation products in one easy reference guide. These products are guaranteed to be in stock. Bolick Distributors stocks other flooring installation products that are not represented in this catalog. In addition, Bolick Distributors has access to many other tools and supplies available by special order. Please inquire with your Bolick Sales or Customer Service Representative.

This installation product reference guide is divided into two sections:

- I. Ceramic Tile Supplies
- II. Flooring Supplies

The Ceramic Tile Supplies section represents products and tools for installing ceramic tile. The general Flooring Supplies section represents products and tools for installing carpet, wood, laminate, vinyl, and linoleum.

TERMS AND CONDITIONS OF SALE

Payment Terms: Net 30 Days

Delivery Charges: \$27.50 Local (Baton Rouge area), \$37.50 LA, MS, AL & \$39.50 AR & TX
Plus Current Fuel Surcharge

Product Returns:

1. In the event of a Bolick shipping error, a time and date for pick-up and/or redelivery will be scheduled. Delivery and restocking charges are waived.
2. All other product returns will carry a 20% restocking fee providing that the return in question meets the following criteria:
 - The material must be returned within **30 days** from the date of invoice
 - All materials must be in first grade condition and in full, unopened cartons
 - Cabin, builder grade, seconds and cut orders are not eligible for return
 - Ceramic tile returns of less than 4 cartons are not eligible for return
 - Powdered goods and sealers are not eligible for return
 - Ceramic tile, laminate, and hardwood trim are not eligible for return
 - Special and custom run mill orders are not eligible for return

Open Orders: Bolick will reserve materials for customer open orders for a period of 30 days. After 30 days, all open orders will be cancelled and those reserved materials will be returned to inventory and made available to fill other customer orders.

Adhesive Policy: It is the sole responsibility of the customer to determine which adhesive is suitable for each individual product installation. Bolick Distributors assumes no responsibility or liability for incorrect adhesive used with any product.

Shipping Policy: It is the responsibility of the customer to match all material orders received with what materials were ordered to ensure accuracy of products selected by the end user.

ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

**Bolick Distributors
Installation Products Catalog
No. 08-1101**

Contents

Ceramic Tile Supplies

Surface Preparations

CureLastic 949	2
Ultra Cure 971	2
ProRed 963	2
ProFlex	2

Mortars

Floor Mix 900	3
M-Bond Ultra Set® 918	3
M-Flex Strata® 914	3
Multi Set® 917	3
QuickCure 908	4
ThinSet 911	4
Uniflex® 916	4
Bolick Bond 007	5
Full Contact 907	5
M-Lite 929	5

Grouts

AR® Grout Sanded 922	6
CurePerfect® 930	7
ColorSet Epoxy System 931	8

Mastics

PermaBond® Ultra 1002	8
-----------------------------	---

Specialty Products

C-Clean 985	9
CureCaulk 986	9

Installation Tools

Ceramic Tile Cutters

Rubi® SPEED Tile Cutter	9
-------------------------------	---

Trowels

No. 9 PC-U Plastering Trowel	10
Pointing Trowel	10
Gauging Trowel	10
Margin Trowel	10

Grout Floats

No. 103 Grouting Float	11
No. 43 Premium Float	11
No. 44 Toe-Space Premium Float	11
Green Gum Float	11
Precision™ Float	11

Mixers

Jiffler Mixer No. 140	12
No. MM30 Mixer	12

Saws

No. 336 Undercutting Saw	12
No. 820 Heavy Duty Undercut Saw Kit	13
No. 555 Multi-Undercut Saw	13
No. 812 Super Saw Kit	14
Tilematic® G2 Tile Saw	14
Super Tilematic® G2 Tile Saw	15
D24000 10" DeWalt Wet Tile Saw	15
No. 356 Ceramic Tile Hole Saw	16
Core Bits	16
No. GS50 Grout Saw	16

Miscellaneous

No. 20 Aluminum Straight Edge Set	16
No. 30 Aluminum Straight Edge Set	17
No. 209 Super-Soft Knee Pads	17
No. 198 Sponge Rubber Knee Pads	17
Caulking Guns for Spouted Cartridges	18
No. 223-54 Rub Brick for Ceramic Tile	18
No. 2618 Black Beauty Duster Brush	18
No. 80 Superior Tile Cutter® Nippers	18
Malco Aluminum Handle Tin Snips	19
Lufkin® Wood Folding Rules	19

Tile Care Products and Finishes

Tile Sealers	19
Stone Care	20
Tile Cleaners	21
Tile Problem Solvers.....	21
Floor Finishes	22

Backer Board, Threshold & Shower Pan Liner

Backer Board	22
Marble Threshold	22
Shower Pan Liner	22

Flooring Supplies - Wood, Laminate, Carpet, Vinyl & Linoleum Installation

Surface Preparations

Featheredge™ FastSet 979	23
UniLayment FastSet 969	23
LatexUnderlayment Regular 962	23

Adhesives & Seam Sealers

FAST 050:Economy Grade Multipurpose Adhesive	24
Monster Bond Multipurpose Adhesive	24
FAST 075: High Performance Carpet Adhesive	24
SAF-T 003 Contract Grade Multi-purpose.....	25
Fast 019: High Performance Outdoor Carpet Adhesive	25
PS 100: Trowel Grade Pressure Sensitive Adhesive	25
022: Commercial Seam Sealer	26
029: Flammable Pad Cement	26
Armada® AM-40 Acrylic Urethane Wood Flooring Adhesive	26
Armada® AM-70 Wood Flooring Adhesive	27
ST100	27
TA 380: Thin Spread VCT Adhesive	27
TA 480: Thin Spread VCT Adhesive	28
CB 005 Acrylic Latex Cove Base Adhesive	28
TackBond Construction Adhesive.....	28
Flammable Contact Cement 028.....	29

Seam Tape

K-20 Premium 4" Seam Tape	28
K-40 Supreme 4" Seam Tape	28
Super 3SB Wide 6" Seam Tape	29

Installation Tools

No. 100-LR 100 lb. Roller – 5 ¼" diameter	30
No. 143 Adhesive Syringe	30
No. 166 Duckbill Napping Shears	30
No. 177 Carpet Shears.....	31
No. 350-2W White Rubber Mallet	31
No. 214 Carpet Kicker	31
No. 261 & 262 Straight Stair Tools	32
No. 400-CS Junior Power Carpet Stretcher	32
No. 57-ML Moulding Lifter	32
No. H-76 12" Tile Cutter With Casters	33
No. 4 (notch) U Professional Trowel	33
No. 716 Conventional Back Carpet Trimmer	33
Action Knife for Slotted Blades	33
Utility Knife for 3 Notch Blades	34
Personna® Blades	34
No. 790 4" Replaceable Blade Scrapers	34
No. 375 8" Replaceable Blade Scrapers	34
No. 812 Super Saw Kit	35
Seam Irons	35

Sundries

Sanding Discs	35
Concrete Nails	36
Tack Strip	36
Tape	36
Duo-Fast™ Electric Tacker	36
No. GB-1 Chalk Line Reel	37
Ultra-Fine Chalk Powder	37

Trim

Metal Trims	38
-------------------	----

Underlayment

Silent Treatment®	39
Solid Walk	39
Sound Barrier Plus	39



CureLastic 949

CureLastic is a ready-mixed, organic trowel applied, anti-fracture membrane and adhesive developed to install ceramic tile and stone over a variety of substrates.

Coverage: 45-60 sf per gallon (3/16" x 5/32" V-notched trowel)
35-50 sf per gallon (1/4" x 1/4" square-notched trowel)

In Stock: 1 Gallon

Item: CC-CURELASTIC



Ultra Cure 971

C-Cure UltraCure is a cementitious based elastomeric anti-fracture waterproofing membrane modified with an acrylic polymer that will produce a tile setting adhesive specially developed for the installation of all types of tile, marble and stone over a variety of surfaces. UltraCure is trowel applied to develop a continuous positive moisture barrier with excellent adhesion to wood, dry concrete block and cementitious backer units.

Coverage: A two gallon unit covers 104 sf at 30 mils; 90 sf at 45 mils;
and 60 sf at 55 mils. Note: the thicknesses: 3/32" V-notched yields 30
mils; 3/16" V-notched yields 45 mils; and 1/4" square-notched yields 55 mils.

In Stock: 2 Gallon

Item: CC-ULTRACURE



ProRed 963

ProRed 963 waterproofing membrane is a ready-to-use, elastomeric waterproofing and anti-fracture membrane for all interior and exterior commercial and residential tile and stone installations. Easily applied with roller, trowel or sprayer producing a continuous moisture barrier with outstanding adhesion. Reduces crack transmission in ceramic tile or stone floors.

Coverage: **As an Anti-Fracture Membrane:** 110 sf/gal at 30 mil thickness when wet
As a Waterproof Membrane: 35-40 sf/gal @ 93 mil thickness when wet. 47 mils dry.

In Stock: 2 Gallon and 5 Gallon

Item: CC-PRO-RED2 and CC-PRO-RED5



PROFLEX™ 40 Crack Isolation Sound Membrane

ProFlex™ 40CISM is a 40 mil composite underlayment consisting of a rubberized membrane laminated to a high-strength reinforcing fabric on the face and a siliconized release sheet on the adhesive side. It is specially designed to be used under thin-set or mud-set mortars and adhesives for interior and exterior applications of wood flooring to eliminate the transmission of cracks in finished floor work, the product should be applied to the entire substrate prior to the installation of the finished flooring.

In Stock: 40 mil underlayment, P11 Primer & Crack Isolation Kit

Item: CC-PF-CISM 40MIL

CC-PF-PR11PRIMER

CC-PF-CRACK KIT




Floor Mix 900

FloorMix is a factory blend of Portland cement, fine sand and special chemical additives which product excellent dry-set mortar for floor tile for floor tile installations of low absorption tiles (less than 7%).

Coverage: 75 sf per 50 lb. bag (1/4" x 1/4" square-notched trowel)
65 sf per 50 lb. bag (1/4" x 3/8" square-notched trowel)
39 sf per 50 lb. bag (1/2" x 1/2" v-notched trowel)

In Stock: 50 lb. Gray
Item: CC-FLOORMIX

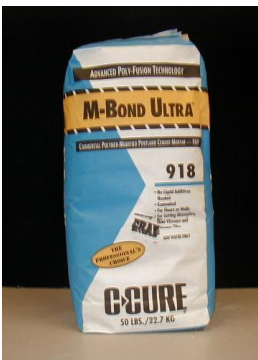

M-Bond Ultra Set® 918

M-Bond Ultra® is a contractor grade, polymer-modified Portland cement mortar designed for the bonding of all types of tiles over a variety of substrates. It may be used on walls or floors for both interior and exterior applications where a latex-modified mortar is recommended.

Coverage: 77 sf per 50 lb. bag (1/4" x 1/4" square-notched trowel)
66 sf per 50 lb. bag (1/4" x 3/8" square-notched trowel)
40 sf per 50 lb. bag (1/2" x 1/2" v-notched trowel)

In Stock: 50 lb. (Gray)
Item: CC-MULTI BOND



M-Flex Strata® 914

M-Flex Strata® is a flexible, latex-Portland cement mortar that is composed of an integral blend of special diverse dry polymers, plasticizers, Portland cement and sand. When cured, each separate polymer imparts distinct characteristics which compliment the other polymers forming a union which provides for 48% higher flexural strength than conventional mortars, thus furnishing the ultimate in a single component latex-Portland cement mortar.

Coverage: 77 sf per 50 lb. bag (1/4" x 1/4" square-notched trowel)
66 sf per 50 lb. bag (1/4" x 3/8" square-notched trowel)
40 sf per 50 lb. bag (1/2" x 1/2" v-notched trowel)

In Stock: 50 lb. Gray and 50 lb. White
Item: CC-MULTI-FLEX



MultiSet 917

The economical polymer-modified dry-set mortar designed for the bonding of all types of tiles. It may be used for either walls or floors for both interior and exterior applications where a liquid latex-modified mortar is recommended. MultiSet 917 is a blend of Portland cement, sand and special dry latex additives that significantly improve bond strength and freeze-thaw stability — performance characteristics typically available only through the addition of liquid latex additives to dry-set mortar.

In Stock: 50 lb. Gray
Item: CC-MULTI-Set GRA

PRODUCT	COVERAGE		
	SQUARE FEET (M ²) PER 50 LB. (22.7 KG) BAG		
	1/4" x 1/4" x 1/4" (6 x 6 x 6 mm)	1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm)	1/2" x 1/2" x 1/2" (12 x 12 x 12 mm)
MultiSet 917	77 (7.1)	66 (6.1)	40 (3.7)



QuickCure 908

QuickCure is a polymer modified dry-set mortar designed to be used as a fast setting bond coat for the installation for all types of tile over a variety of substrates. QuickCure enables the contractor to set tile and grout within 2 hours to provide a finished installation which can be open to full foot traffic in hours. These areas include tile repairs, main entrances, elevator waiting areas, escalator landings and other areas requiring minimum downtime.

Coverage: 77 sf per 50 lb. bag ($\frac{1}{4}$ " x $\frac{1}{4}$ " square-notched trowel)
 66 sf per 50 lb. bag ($\frac{1}{4}$ " x $\frac{3}{8}$ " square-notched trowel)
 40 sf per 50 lb. bag ($\frac{1}{2}$ " x $\frac{1}{2}$ " v-notched trowel)

In Stock: 50 lb. Gray
 Item: CC-QUICK




ThinSet 911

ThinSet is a factory blend of Portland cement, sand and a unique blend of special additives. C-Cure ThinSet produces an excellent bond with greater coverage than conventional dry-set mortars for the installation of ceramic tile.

Coverage: 81 sf per 50 lb. bag ($\frac{1}{4}$ " x $\frac{1}{4}$ " square-notched trowel)
 70 sf per 50 lb. bag ($\frac{1}{4}$ " x $\frac{3}{8}$ " square-notched trowel)
 42 sf per 50 lb. bag ($\frac{1}{2}$ " x $\frac{1}{2}$ " v-notched trowel)

In Stock: 50 lb. Gray
 50 lb. White
 Item: CC-GRAY or CC-WHITE

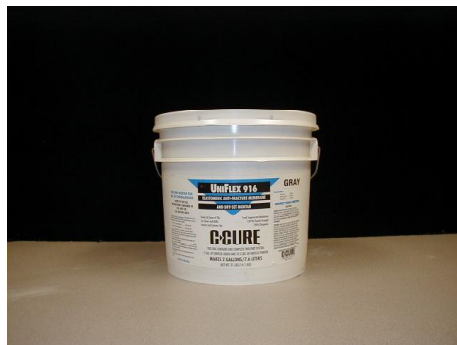


UniFlex® 916

UniFlex® is a technological breakthrough in the development of a truly elastomeric dry-set mortar for the installation of ceramic tile and dimension stone. UniFlex is composed of a unique synergism of latex polymers and Portland cement. UniFlex may also be used as an elastomeric anti-fracture membrane for the installation of ceramic tile, marble, slate and granite over a variety of surfaces.

Coverage: 25 square feet per gallon at $\frac{1}{16}$ " thickness
 7.5 square feet per gallon at $\frac{3}{32}$ " thickness

In Stock: 1 Gallon Units Gray
 2 Gallon Units Gray
 4 Gallon Units Gray
 Item: CC-UNIFLEX

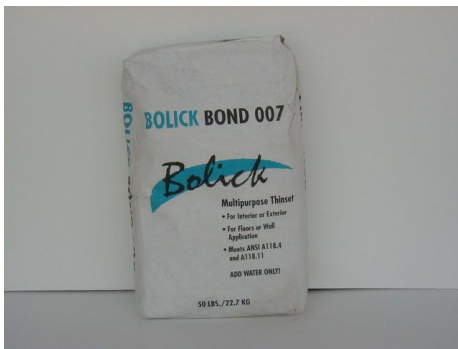

Bolick Bond 007

BolickBond is a specially refined dry-set mortar with latex-polymer powder pre-blend in the bag. Composed of portland cement, sand and special polymer additives, BolickBond is used as a bond coat for setting all types of ceramic tile, marble and stone over a variety of substrates. BolickBond offers the economy and ease of application of dry-set mortars while significantly improving bond strengths, freeze-thaw stability, flexibility and other qualities formerly only available throughout the use of liquid latex additives or epoxy emulsion systems.

Coverage: 77 sf per 50 lb. bag (1/4" x 1/4" square-notched trowel)
66 sf per 50 lb. bag (1/2" x 1/2" square-notched trowel)

In Stock: 50 lb.

Item: BOLICK BOND



Full Contact 907

PRO Full Contact 907 is specifically formulated to provide a single-step installation method for large format ceramic tile and stone. It fully supports heavy tiles and stone, reducing lippage problems and the need for leveling of pre-floating rough surfaces.

Coverage: 65 sf per 50 lb. bag (1/4" x 3/8" x 1/4" square-notched trowel)
45 sf per 50 lb. bag (1/2" x 1/2" x 1/2" square-notched trowel)
36 sf per 50 lb. bag (3/4" x 9/16" x 3/8" square-notched trowel)

In Stock: 50 lb. Gray

50 lb. White

Item: CC-907



PRO M-Lite 929 Tile & Stone Mortar


Offers high flexibility and bond strength for a wide variety of floor and wall tile installations. Excellent for setting large format tile or stone, PRO M-LITE 929 will not sag or slip on walls and offers non-slump performance for floor installations. PRO M-LITE 929 is 40% lighter than traditional mortars, providing excellent handling characteristics. A 30 lb. (13.6 kg) bag covers the same area as a 50 lb. (22.7 kg) bag of traditional mortar. Formulated with recycled material – contributes to LEED certification. This product is covered by a 10 year warranty. Applicable ANSI Standards: A118.4 and A118.11

In Stock: 50 lb. grey and 50 lb. white

Item: CC-M-LITE GRAY

CC-M-LITE WHITE

PRODUCT	COVERAGE		
	SQUARE FEET (SF) PER 50 LB. (22.7 KG) BAG	SQUARE FEET (SF) PER 30 LB. (13.6 KG) BAG	SQUARE FEET (SF) PER 10 LB. (4.5 KG) BAG
PRO M-LITE 929 TILE & STONE MORTAR	1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) Square-Notch Trowel	1/4" x 3/8" x 1/4" (6 x 6 x 9.5 mm) Square-Notch Trowel	1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) Square-Notch Trowel
	90 - 100 (8.4 - 9.3)	63 - 70 (5.6 - 6.5)	45 - 50 (4.2 - 4.6)

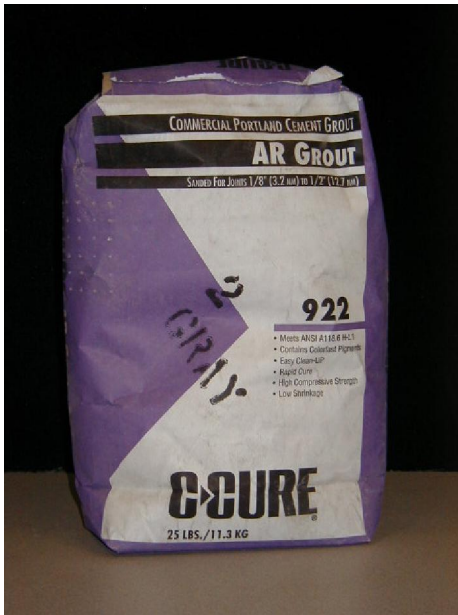

AR® Grout Sanded 922

AR® Grout is a blend of Portland cement, specially graded silica sand and colorfast pigments that form a dense matrix, free of any voids. In addition, special chemicals have been added to provide for a superior grout that offers ease of workability and cleanup, rapid cure, high compressive strength, low shrinkage, good bond strength and color control. AR is highly resistant to bacteria, fungus, oils and alkalies. It is nontoxic, non-dusting and does not contain iron.

Coverage: Varies according to tile size and grout joint size

In Stock: 25 lb. bags (40 distinctive colors)

Item: CC- (color #) -25

AR® Grout Sanded 922

Gray

CC-014 Natural Gray (25 lb. & 50 lb bags)

CC-002 Gray (50 lb. bags)

Group I Colors - 25 LB Bags

CC-040	Adobe	CC-061	Executive Gray	CC-051	Sand
CC-103	Agate	CC-002	Gray	CC-030	Sandsotne
CC-163	Almond	CC-131	Kahlua Cream	CC-027	Sahara Brown
CC-018	Antique White	CC-036	Macadamia	CC-115	Silver Gray
CC-053	Bone	CC-127	Moonstone	CC-258	Straw
CC-031	Buckskin Beige	CC-142	Pearl Gray	CC-047	Sunrise Pink
CC-251	Canvas	CC-113	Pebble Beach	CC-252	Tumbleweed
CC-019	Cream	CC-060	Pueblo	CC-025	White
CC-042	Dusty Rose				

Group II Colors - 25 LB Bags

CC-099	Amber	CC-257	Hot Chocolate	CC-255	Salitllo
CC-008	Black	CC-024	Rust	CC-102	Topaz
CC-256	Caramel	CC-027	Sahara Brown	CC-259	Winter Frost
CC-081	Citrine				

Group III Colors - 25 LB Bags

CC-140	Black Jade	CC-086	Ocean Blue
CC-035	Catalina Jade	CC-022	Walnut
CC-254	Flint Green		

CurePerfect® 930

The CurePerfect® Grout System marks the latest step in the evolution of grouting systems for ceramic tile, marble and stone surfaces. It solves the most persistent problems encountered with traditional Portland cement.

CurePerfect is a two (2) part system (patented design and formulation) that mixes to produce a polymer modified Portland cement grout

1) The CurePerfect **Powder Base Component** is available in two grades: white sanded and white non-sanded. All grades are a blend of Portland cement, chemical admixtures, organic and inorganic chemicals and specially graded silica or powered mineral fiber.

2) The CurePerfect **Liquid Colorant** is a pre-dispersed emulsion of latex polymers, mineral pigments, dispersants, mildewcides and cement curing compounds.

Coverage: Varies according to tile size and grout joint size

In Stock: All Colors

Liquid Item: CC- (color #)

Powder Item: CC-930-NS
CC-930-S

MIXING UNITS ARE MADE AS FOLLOWS:

35 lb. Sanded Unit = 35 lb. Powder & 1 Gallon Color

10 lb. Sanded Unit = 10 lb. Powder & 36 oz. Color

17.5 lb Non Sanded Unit = 17.5 lb. Powder & 1 Gallon Color

5 lb. Non Sanded Unit = 5 lb. Powder & 36 oz. Color



CurePerfect® 930

STANDARD GROUT COLORS

CC-040	Adobe	CC-061	Executive Grey	CC-051	Sand
CC-103	Agate	CC-002	Gray	CC-030	Sandstone
CC-163	Almond	CC-131	Kahlua Cream	CC-115	Silver Gray
CC-018	Antique White	CC-036	Macadamia	CC-258	Straw
CC-053	Bone	CC-127	Moonstone	CC-047	Sunrise Pink
CC-031	Buckskin Beige	CC-014	Natural Gray	CC-252	Tumbleweed
CC-251	Canvas	CC-142	Pearl Gray	CC-025	White
CC-019	Cream	CC-113	Pebble Beach		
CC-042	Dusty Rose	CC-060	Pueblo		

PREMIUM GROUT COLORS

CC-099	Amber	CC-257	Hot Chocolate	CC-102	Topaz
CC-008	Black	CC-024	Rust	CC-259	Winter Frost
CC-256	Caramel	CC-027	Sahara Brown		
CC-081	Citrine	CC-255	Saltillo		

DESIGNER GROUT COLORS

CC-140	Black Jade	CC-254	Flint Green	CC-022	Walnut
CC-035	Catalina Jade	CC-086	Ocean Blue		



Supreme 925

Supreme Dry-Set Grout is a chemically intensified Portland cement based grout which possesses exceptional working qualities and permanent joint life. It is non-shrinking, nontoxic and odorless. Supreme inhibits fungus growth and contains an inhibitor to neutralize complex heavy metal salt stains common with some soft bisque ceramic tiles.

Coverage: Varies according to tile size and grout joint size
 In Stock: White
 Item: CC-LG DRY WALL



ColorSet Epoxy System 931

ColorSet Epoxy is a patented 100% solids blend of epoxies and silica fillers. It is to be used for the setting and grouting of ceramic tile and pavers over a wide variety of substrates, interior and exterior. It produces a mortar that is stain resistant, impermeable and high in strength and shock resistant. ColorSet Epoxy has exceptionally high resistance to acids, alkalis and most solvents.

Coverage: Varies according to tile size and grout joint size
 In Stock: Limited colors in stock, others available special order
 Item: CC-(color #)-1/2 GAL Epoxy Part A
 CC-EPOXY 100 PAO Epoxy 1/2 Gallon Part B
 CC-EPOXY 100 PAR Epoxy 1 Gallon Part B



PermaBond® Ultra 1002

PermaBond® Ultra is a superior strength adhesive composed of the highest quality organic resins and latexes. It has been formulated to perform equally well for both wall and floor tile installations.

In Stock: Gallon
 3.5 Gallon
 Coverage: 40 - 60 sf per gallon (3/16" x 1/4" v-notched trowel)
 35 - 50 sf per gallon (1/4" x 1/4" square-notched trowel)
 Item: CC-150



C-Clean 985

C-Clean is a granular product that is mixed with clean water. C-Clean solution produces a safer and better alternative over muriatic acid for cleaning tile and grout surfaces. C-Clean does not produce toxic fumes, damage chrome or steel surfaces, bleach or burn grout joints, and does not cause hazardous or corrosive transport, handling or storage problems.

In Stock: 2 lb.
8 lb.
Item: CC-CLEAN



CureCaulk 986

CureCaulk is a superior quality siliconized acrylic latex caulk that is mold and mildew resistant. The product forms a long-lasting, flexible, water tight seal that will resist cracking on most building materials, including glass, wood, ceramic, metal and stone. CureCaulk is available in all of C-Cure's grout colors.

In Stock: 10.3 oz. Cartridge
Item: CC-(color #)-CS Sanded Cure Caulk
CC-(color #)-CNS Non Sanded Cure Caulk




Rubi® SPEED Tile Cutter

This professional ceramic tile cutter makes straight and diagonal cuts in tile up to 9/6" thick. The cutter features a sturdy die cast aluminum base with durable rubber pads to support the tile and a breaker bar that pivots to adjust for different thicknesses. The scale has both inch and metric graduations. The cutter includes a No. 09158 Scoring Wheel, a double walled polyethylene carrying case, a plastic 45° cutting guide and illustrated operating instructions. The No. SPEED-62 has two each 8" side arm tile support extensions.

In Stock: Rubi® SPEED-62 Tile Cutter
No. 01958 Scoring Wheel
Item: TG-R62, TG-01958



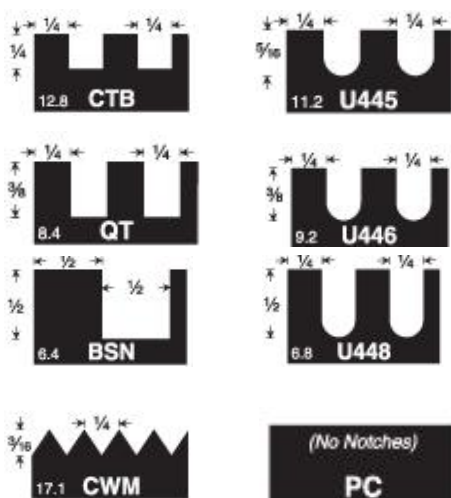

No. 9(notch)-U Professional Trowel

This trowel has a 4 1/2" wide x 11 1/2" long high carbon bright spring steel blade for maximum life.

In Stock:

1/4" x 1/4" x 1/4" Square-Notch (CTB)
 3/8" x 1/4" x 1/4" Square-Notch (QT)
 1/2" x 1/2" x 1/2" Square-Notch (BSN)
 3/16" x 1/4" x 1/4" V-Notch (CWM)
 5/16" x 1/4" x 1/4" U-Notch (U445)
 3/8" x 1/4" x 1/4" U-Notch (U446)
 1/2" x 1/4" x 1/4" U-Notch (U448)

Item:

TG9CTB
 TG9QT
 TG9BSN
 TG9CWM
 TG9U445
 TG9U446
 TG9U448



No. 9 PC-U Plastering Trowel

Used mainly to apply mortar beds for ceramic tile installations. The No. 9PC-U trowel blades are made from the highest grade of tempered, ground and polished spring steel. This trowel has a cast aluminum mounting and is available in the sanded hardwood and molded rubber cushion Ultigrip (-U) 'California Handle' style.

In Stock: No. 9PC-U

Item: TG9PC



Pointing Trowel

Gauging Trowel

Margin Trowel

Marshalltown trowels are top quality professional tools. Each trowel is forged from a single piece of highest grade tool steel that is tempered, ground and polished from toe to heel. The hardwood handle has a steel ferrule for added handle strength.

In Stock: No. 45 - 7" x 3"
 No. 48 - 7" x 3 3/8"
 No. 52 - 5" x 2"

Item: TG45-7
 TG48
 TG52





No. 103 Grouting Float

No. 103 has a firm, black molded sponge rubber pad with a closed face. It has a sanded hardwood handle and an aluminum backing plate. Pad measures 4" wide x 9 ½" long x 5/8" thick.

In Stock: No. 103 Grout Float

Item: TG103



No. 43 Premium Float

This popular float has a sanded hardwood handle and an aluminum backing plate. Pad measures 4" wide x 9 ½" long x ¾" thick.

In Stock: No. 43 Premium Float

Item: TG43



No. 44 Toe-Space Premium Float

The offset handle and narrow pad permit easier horizontal and vertical grouting in toe space areas such as under kitchen cabinets and vanities. The long wearing 100% gum rubber face is bonded to a dense foam rubber pad. The extra thick aluminum backing resists bending. Handle is offset 3" from one end to allow easy and complete access to toe space areas. It can also be used for field grouting. Pad measures 3" wide x 13" long x 5/8" thick.

In Stock: No. 44 Toe-Space Premium Float

Item: TG44



Green Gum Float

This float is made of 100% gum rubber for long wear on epoxy grout cleanup work. It can also be used with sanded grouts and the rubber edges can be sanded to maintain their original sharpness. It has a sanded hardwood handle and pad measures 4" wide x 10 ½" long x ½" thick.

In Stock: Green Gum Float

Item: TGGK-1



Precision™ Float

This Ultratight™ float features a nonmarring plastic handle to prevent scratching of tile surfaces. It is designed for comfortable use, and is also easy to clean since grout doesn't stick to the handles. This float has a 100% solid green gum rubber pad and is recommended for floor use with epoxy grouts. Pad measures 3 5/8" wide x 10" long x ¾" thick.

In Stock: Precision™ Float

Item: TGUFF-1



Jiffler Mixer No. 140

This scientifically designed and patented Jiffler Mixer is absolutely the finest for rapid and thorough mixing of ceramic tile thinset mortar mixes, epoxy adhesives, powder type floor underlayment, paint, drywall mud, industrial coatings, waterproofing materials, etc. The unique four-way counteraction gives fast and complete dispersion with no splash and no air lumps in the mix. Upper wheels pull down, lower wheel cuts up — the holes and slots screen out the lumps. All mixers have adjustable wheel positions to give best performance in a particular container and are made from corrosion resistant plated steel. The 3/8" diameter shaft of the No. 140 has three equally spaced flats on the end to prevent slipping in the drill chuck. The No. 140 has three 5" diameter wheels on a 3/8" x 24" shaft.

In Stock: Jiffler Mixer No. 140

Item: TG140



No. MM30 Mixer

For thinset mortar, grout and other powdered materials, this 30" overall length mixer can be used without stooping. It has sturdy all steel welded construction and is completely plated for rust protection. The stiff, solid 7/16" hexagonal steel shaft won't bend from use in heavy mixes, nor slip in the drill chuck. Frame is 8 1/4" wide x 4 1/4" high, and blades are shaped to mix in an inside out pattern. This reduces air in the mix to a minimum. It weighs 2 lbs.

In Stock: No. MM30 Mixer

Item: TGMM-30



No. 336 Undercutting Saw

This saw undercuts doorjambs and other wall obstacles. It eliminates intricate fitting work. The specially shaped 12" long blade permits right or left hand cutting. The comfortable wood handle is sufficiently offset to provide knuckle protection. It comes supplied with a small knob for optional use (in place of the front wing nut) for two handed sawing. The replaceable blade is made from high carbon saw steel, and has 10 points per inch.

In Stock: No. 336 Undercutting Saw

No. 336-RB Replacement Blade

Item: TG336

TG336-RB



No. 820 Heavy Duty Undercut Saw Kit

This powerful saw undercuts walls, door jambs, doors, inside corners and most toe spaces. The 6 1/2" diameter No. 821 carbide tipped steel blade an fully undercut most doors in place and when used with the No. 805 Masonry Blade, can also be used for undercutting hearths. Each saw kit includes Nos. 805 masonry blade, 821 carbide tipped steel blade, saw, plastic carrying case, wrench for blade removal and instructions.

In Stock: Undercutting Saw Kit
Carbide Tipped Steel Blade
Masonry Blade

Item: G820
TG821
G805



No. 555 Multi-Undercut Saw

This saw undercuts walls doorjamb, under toe spaces and will also fully undercut inside corners up to 1/4" deep. The height of cut is easily adjustable from flush to one inch above the floor. The large flat base helps prevent tipping and assures accurate, level cutting. It has dual angle depth gauge that is an exclusive to the saw and allows undercutting at a 'straight on' or 45° angle. An adjustment scale provides precision depth control in 1/8" increments. Each saw comes with No. 556 36-tooth 5 5/8" diameter Carbide Tipped Steel Blade, custom molded carrying case, spanner wrench for blade removal and detailed operating instructions.

In Stock: No. 555 Multi-Undercut Saw
No. 556 Carbide Tipped Steel Blade

Item: TG555
TG556





No. 812 Super Saw Kit

This completely redesigned super saw has the most features and power available of any undercutting saw. The 13 AMP motor and 6 1/2" diameter flush-cutting blade can fully undercut inside corners even in areas with as little as 12" clearance, like small closets. Doors as thick as 1 3/4" can be undercut without removal. Blade height is adjustable from a flush cut to a maximum of 1/4" off the floor. Super Saw Kit includes Nos. 805 masonry blade, 821 carbide tipped steel blade, saw, plastic carrying case and hex wrench.

In stock: Super Saw Kit
Carbide Tipped Steel Blade
Masonry Blade
Item: G812
TG821
G805



Tilematic® G2 Tile Saw

The Tilematic G2 will cut 16" diagonally, up from 12" previously. The Tilematic G2 will now rip cut a 24" tile. The new, galvanized pan will resist rust while the new blade shaft lock will make blade removal easier. The conveyor cart is 50% larger to better support bigger tile. This saw has the unique ability to make spring-assisted plunge cuts and feature cam adjustment to aid in belt tensioning.

The 1-1/2 horsepower Baldor continuous-duty motor is totally enclosed, fan cooled and designed exclusively for Target. It is available as a single voltage in the Tilematic G2. Able to run on most 115V outlets, the motors are UL and CSA approved and backed by the manufacturer's limited, one-year warranty.

In Stock: Tilematic® G2 Tile Saw
Replacement blades from 4" to 10" available upon request
Item: TA10100 G2

NEW!



Tilematic G2

Super Tilematic® G2 Tile Saw

The Super Tilematic G2 will cut 22" diagonally, up from 18" previously. The Super Tilematic G2 will rip cut a 31" tile. The new, galvanized pan will resist rust while the new blade shaft lock will make blade removal easier. The conveyor cart is 50% larger to better support bigger tile and comes with a standard extension in the Super Tilematic G2 version. This saw has the unique ability to make spring-assisted plunge cuts and feature cam adjustment to aid in belt tensioning. The 1-1/2 horsepower Baldor continuous-duty motor is totally enclosed, fan cooled and designed exclusively for Target. It is available as a single voltage in the Tilematic G2 or as a single or dual voltage in the Super Tilematic G2. Able to run on most 115V outlets, the motors are UL and CSA approved and backed by the manufacturer's limited, one-year warranty.

In Stock: Super Tilematic® G2 Tile Saw
Replacement Blades from 4" to 10" available upon request
Item: TA10100STM G2

D24000 10" DeWalt Wet Tile Saw



The DeWalt wet tile saw features cantilevering Rail/Cart system allows for 24" ripping capacity - 18" tile on diagonal. It weighs only 69 lbs which allows one person to transport and set up saw. It has a stainless steel rail system which is integrated into the tile saw frame, insuring accurate cuts. It features integrated 45/22.5° miter feature for quick angled cuts. The plunge feature allows the user to make quick plunge cuts for electrical outlets and A/C registers. The dual water nozzles can be adjusted for optimal water placement on blade. Rear and side water attachments can be placed on tile saw to catch over spray from large tile. It has a removable cutting cart for easy cleaning of tile saw. A powerful 1.5 HP motor will cut hard materials such as porcelain and stone. The 5 gallon water pan allows for quick tile saw setup and breakdown.

In stock: DeWalt 10" Wet Tile Saw
Tile Saw Stand
10" Porcelain Tile Blade
Item: DEWALT D24000
DEWALT D24001
DW4762



No. 356 Ceramic Tile Hole Saw

Carbide grit edge cuts 1 3/8" diameter holes in ceramic wall tile for water pipes. Spring automatically ejects slug. Has a 3/8" diameter shank that holds a 1/4" diameter carbide tipped pilot drill bit.

In Stock: Ceramic Tile Hole Saw
Item: TG356



Core Bits

Professional wet cor bit for granite. 1-3/8 x 5/8-11. General purpose standard dry core bit. 1-3/8 x 3/8.

In Stock: Professional Wet Core Bit For Granite
General Purpose Standard Dry Core Bit
Item: PAHB138GRT
PAHB138L2



No. GS50 Grout Saw

Used for removing ceramic wall tile grout, this saw features a replaceable 2" long blade that is tipped with tungsten carbide grit for fast cutting and long life. Comfortable plastic handle has a hang-up hole. For wider joints, tow blades can be mounted on either side of the handle. Tool is 7" long overall and weighs 4 ozs.

In Stock: Grout Saw
Replacement Blade
Item: TGGS50
TGGS50-RB



No. 20 Aluminum Straight Edge Set

used as mortar screeds

For ceramic tile installation work, the angle type construction of this tool makes it strong and rigid. Unlike wood, it cannot warp or rot, and will maintain its original straightness. This clear anodized aluminum is extremely lightweight and cannot rust. Easy to handle, individual straight edges nest for compact storage. When stored, the entire set is held together by a screw and wing nut. Set consists of five lengths as follows: 6', 4' 10", 4', 3', and 2'. Weighs 13 lbs.

In Stock: Aluminum Straight Edge Set
Item: TG20



No. 30 Aluminum Straight Edge Set

used as mortar screeds

For ceramic tile installation work, this set has a heavy duty rectangular construction to make it our straightest and strongest aluminum straight edge set. Both ends of each individual straight edge are plugged with a plastic insert to prevent mortar from weighing down the tool. Clear anodized aluminum construction means this set cannot rust, rot or warp like steel, or wood. Specially designed two-piece carrier is spring loaded and adjustable to provide proper tension so straight edges don't slide during transport. U-shaped design of the carrier bottom means straight edges are easily loaded into the carrier after use. Set consists of five lengths as follows: 6', 4' 10", 4', 3', and 2'. Weighs 17 lbs.

In Stock: Aluminum Straight Edge Set

Item: TG30



No. 209 Super-Soft Knee Pads

These lightweight knee pads are constructed of 100% washable neoprene and have a super soft contoured foam rubber pad insert for greater comfort. The front of this knee pad and strap is coated with polyurethane for increased durability and water resistance and will not mark or scratch floors. Quick and easy on/off using the single 3" wide front fastening Velcro® strap. This nonbonding strap keeps you knees free from chafing allowing these knee pads to be worn with shorts.

In stock: Super-Soft Knee Pads

Item: TG209



No. 198 Sponge Rubber Knee Pads

This popular knee pad is durable, flexible and economically priced. Has a rounded smooth surface and single $\frac{3}{4}$ " wide cloth straps with buckles.

In Stock: Sponge Rubber Knee Pads


Item: TG198



Caulking Guns for Spouted Cartridges

Contractor grade guns feature rugged steel construction for rough handling and hard use. Slotted front cap design makes loading fast and easy. End cap prevents cartridge shifting. Both have nonslip two-dog ratcheted drive ram rod. Barrels are ribbed for extra strength. The trigger and fitted grip provides a smooth bead.

In Stock: Caulking Gun for 1/10 gallon cartridges
Caulking Gun for 1 quart cartridges
Item: TGER-3S
TGL-2S

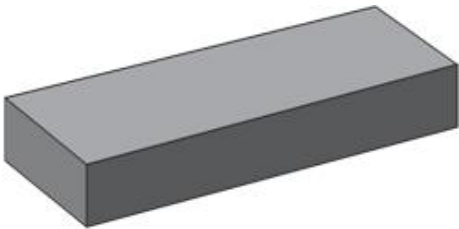

No. 223-54 Rub Brick for Ceramic Tile

Rub bricks are for smoothing cut pieces of ceramic tile for better appearing joints. Silicon carbide abrasive (black color) for economy and longest rub brick life. Rub brick measures 3" wide x 6" long x 1" thick and has a medium grit.

In Stock: Rub Brick
Item: TG223-54



No. 2618 Black Beauty Duster Brush

A top quality model for absolute best results. Has a 100% black horsehair fill. Trim depth is 2 1/2". This 8" model has a 13" beavertail style lightweight wood block.

In Stock: Duster Brush
Item: TG2618



No. 80 Superior Tile Cutter® Nippers

These nippers are 8" long, have carbide tipped jaws, handle stops, plastic handle grips and convenient coil spring reopening action. This model has offset 'side biter' 5/8" straight jaws.

In Stock: Ceramic Tile Nippers
Item: TG80



Malco Aluminum Handle Tin Snips

Lightweight snips with replaceable blades

These popular snips have sturdy heat treated aluminum alloy frames and precision ground tool steel blades. Exclusive blade design gives more leverage and the natural contour hand grips prevent blisters. Blade tips extend slightly beyond the frame and can penetrate openings in lath to cut small circles for pipe fitting work.

In Stock: Tin Snips

Item: TGM-12



Lufkin® Wood Folding Rules

Superior design and workmanship are the reasons why Lufkin makes the best folding rules in the world. Made from select straight grained hard maple, they also feature triple locking joints which eliminate end play. The X46 has a 6" brass extension slide and also have black markings on a tan boxwood finish.

In Stock: Wood Folding Rules

Item: TGX46

Tile Sealers



In Stock: **Penetrating Sealer**

Stain-resistant, below-surface sealer. Retains natural look with no surface shine. Excellent for interior and exterior use.

Size: Gallon

Item: AQG-PENETRATING SEALER



In Stock: **Sealer's Choice 15 Gold**

Premium, water-based, matte finish, natural-look penetrating sealer. Provides maximum stain protection, especially in food preparation and serving areas. Excellent on porous tile and natural stone. Lasts up to 15 years.

Size: Gallon

Item: AQG-SEALERS CHOICE 15



In Stock: **Seal & Finish Low Sheen**

One-step, water-based, stain resistant surface sealer with a durable low-sheen finish. Allows moisture vapor transmission and is not affected by ultraviolet light. Interior and exterior use.

Size: Gallon

Item: AQG SEAL/FINISH



In Stock:

Saltillo Seal & Finish

One-step, water-based, stain resistant surface sealer with a durable high gloss finish. Recommended for use on high porosity surfaces such as saltillo, terracotta, and adobe clay.

Size:

Gallon

Item:

AQG SALTILLO



In Stock:

Grout Sealer

Durable, stain-resistant, natural-look sealer for porous cementitious grout.

Size:

Pint

Gallon

Item:

AQP GROUT SEALER

AGG GROUT SEALER



In Stock:

No. SM02 Grout Sealer & Applicator Gun

Solvent based, inverted aerosol spray can grout sealer.

Size:

15 oz. can & Applicator Gun

Applicator Gun

Item:

TGSM02

In Stock:

Omega Sealer

Water resistant acrylic sealer for use over brick pavers.

Available in gloss or semigloss. Tough and durable.

Size:

1 Gallon & 5 Gallon

Item:

OM113-1GAL. (Gloss)

OM113-5GAL. (Gloss)

OM213-1GAL. (Semigloss)

OM213-5 GAL. (Semigloss)



Stone Care

In Stock:

Marble Repolish

Spray and machine buff cleaner treatment designed to restore a factory like shine to entire installations. Removes light surface scratches and repolishes worn and etched areas.

Size:

24 oz. Spray Bottle

Item:

AQ MRBL REPOLISH



In stock:

Stone Countertop Kit

Great for use on natural stone kitchen & bath countertops.

Each kit includes: Pro-Solv 10 Stone Sealer, Antibacterial Cleaner, Brilliance, and Renue.

Item:

AQ-GRANITE KIT



Tile Cleaners

In Stock: **Concentrated Tile Cleaner**
Super-concentrated, neutral cleaner. Non-acidic, safe for everyday use. Pleasant spearmint scent.

Size: Gallon
Item: AQG MIRACLE CLEA



In Stock: **Heavy Duty Tile & Grout Cleaner**
Concentrated, high-alkaline cleaner and degreaser. Fast, effective waxy and floor finish remover. Non-acidic, will not damage tile or grout.

Size: Quart
Gallon
Item: AQG SPEED STRIP



Tile Problem Solvers

In Stock: **Grout Haze Clean-Up**
Safe, effective concentrated cleaner added to grout clean-up water to remove grout haze and latex additive to tile.

Size: Pint
Item: AQPGROUT HAZE



In Stock: **Grout Release**
Temporary, pre-grout coating for porous, textured, thin brick and masonry. Protects surface from grout or mortar staining.

Size: Gallon
Item: AQG GROUT RELEASE



In Stock: **Sealer & Adhesive Remover**
New, safer, non-methylene chloride formula effectively removes old sealers, adhesives and finishes. Removes epoxy grout haze and is an excellent stain remover.

Size: Gallon
Item: AQG-BOND STRIPPER



Floor Finishes

In Stock: **Floor Shine & Hardener**

Durable, self-polishing, high-sheen non-yellowing, wax-type floor finish. Will withstand high-speed burnishing. Use on interior unglazed, sealed ceramic tile and resilient and wood floors.

Size: Quart
Gallon

Item: AQQ SHINE AND HA
AQQ SHINE AND HA




Backer Board

In Stock: **HARDIBACKER**

Ceramic tile backerboard for floors and countertops. Protect your substrate and maintain tile adhesion.

Size: 1/4"
7/16"

Item: HB 3 X 5 X 1/4
HB 3 X 5 X 7/16

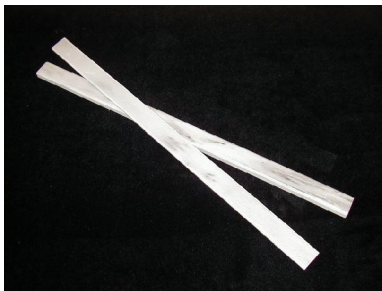


Marble Threshold

In Stock: **Double Bevel Threshold**

Size: 36" x 2" x 3/8"
36" x 2" x 3/4"

Item: TH 3/4 x 36 x 2 DB
TH 3/8 x 36 x 2

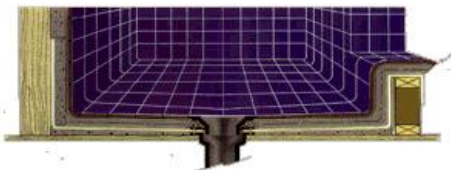


Shower Pan Liner

In Stock: **Chloraloy® Shower Pan Liner**

Chloraloy 240 is manufactured from Chlorinated Polyethylene (CPE), a non-plasticized elastomer. Applications: Shower pans, Roman tub liners, steam rooms, toilet rooms, hydrotherapy rooms, reflecting pools, fountains and planters.

Size: 4'
5'
6'

Item: NO 4FT
NO 5FT
NO 6FT

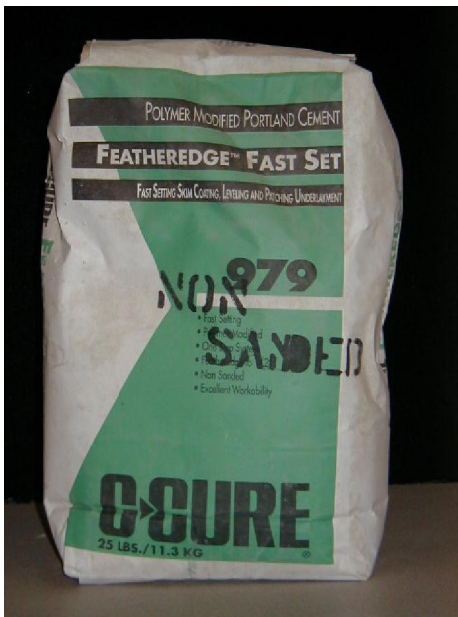

Featheredge™ FastSet 979

Featheredge™ in a non sanded (Portland cement compound for the skim coating, leveling and patching of floors prior to the installation of resilient flooring, carpet, ceramic tile, slate, granite or marble. It features the performance characteristics of patching material that can produce a fine featheredge finish. Polymer modified, Featheredge™ FastSet is a one part system that only requires the addition of water to produce a dense, water resistant surface. The creamy consistency and wetter surface properties provide excellent workability, and when properly mixed, it will featheredge to a non-checking, non-cracking, durable surface 0-1/2" thick

Coverage: 25-27 square feet per 25 lb. bag

In Stock: 25 lb. Bags

Item: CC-FEATHER



UniLayment FastSet 969

UniLayment FastSet is a fast-curing, latex modified, mildew-resistant, Portland cement based leveling and patching compound for floors prior to the installation for resilient flooring, carpet, ceramic tile, slate, granite or marble. For general applications, UniLayment FastSet requires only water to develop a dense, water resistant surface. When UniLayment FastSet is properly mixed (with water) it will featheredge to a non-checking, non-cracking, durable surface 0-1/2" thick.

Coverage: 25-27 square feet per 25 lb. bag

In Stock: 25 lb. Bags – Non Sanded

Item: CC-UNILAYMENT



LatexUnderlayment Regular 962

LatexUnderlayment is a self-curing, liquid latex/Portland cement-based floor leveling system for leveling most types of floors prior to installation of resilient floor coverings, carpet and ceramic tile. LatexUnderlayment represents a major improvement in cementitious leveling material. LatexUnderlayment Regular 962 is designed for pours from featheredge to 3/8" thickness. 2 Part mixer with additive; 1 gallon: 1 40 lb. bag

Coverage: 40 square feet per 25 lbs.

In Stock: 40 lb. Bags

Gallon Additive

5 Gallon Additive

Item: CC-UNDERLAYMENT

CC-UNDERLAYMENT 1 GALLON

CC-UNDERLAYMENT 5 GALLON



FAST 050:Economy Grade Multipurpose Adhesive

FAST 050 is our economy grade multipurpose flooring adhesive. Where cost and time are at a premium choose FAST 050. Features: great for installing felt-backed vinyl sheet goods, perfect for most carpet installations, 60 minute working time for easier positioning, easy to trowel and non staining. Open time: 15 minutes. Working time: 45-60 minutes. Solids: 53%. VOC's: 0. Use to install: Carpet- jute, urethane, ActionBac®, and light latex unitary. Felt-backed vinyl sheet goods.

Coverage: Depends on material backing – approximately 10-20 square yards per gallon

In Stock: 4 Gallon

Item: C-F50



Monster Bond Multipurpose Adhesive

Monster Bond is a high performance multipurpose flooring adhesive used to install: jute, urethane, ActionBac®, latex unitary, woven and hot melt carpet backings and felt backed vinyl sheet goods. Open time: 0-15 minutes. Working time: 45-60 minutes.

Coverage: See chart

In Stock: 4 Gallon

Item: C-MONSTER BOND



FAST 075: High Performance Carpet Adhesive

FAST 075 is the installer's choice as a high performance carpet adhesive. Fast Tacking and early grab make this adhesive the perfect choice for installing even the most difficult carpets. Features and benefits: five year performance warranty, builds tack quickly, excellent re-tack, perfect for stiff carpet backings and has high bond strengths. Open time: 0-15 minutes. Working time: 45-60 minutes. Solids: 62%. VOC's: 38 g/l. Use to install: Carpet – jute, urethane, ActionBac®, Latex Unitary, and woven.

Coverage: Depends on material backing – approximately 10-20 square yards per gallon

In Stock: 4 Gallon

Item: C-F754



SAF•T 003: Contract Grade Multi-Purpose Flooring Adhesive

SAF•T 003 is the installer's choice for price and performance. It features a longer working time for carpet or vinyl, non-staining for felt-backed vinyl sheet goods, strong early grab and it's easy to trowel.

Coverage:

In Stock: Quart
 Gallon

Item: C-SB03Q
 C-SB03G



Fast 019: High Performance Outdoor Carpet Adhesive

This adhesive is recommended for the installation of outdoor carpet. Fast 019's flammable, solvent based formula works in the most aggressive environments. Features include: five year performance warranty, high ultimate bond strength, fast setup and dry time, early weather resistant, easy to trowel and waterproof. Open time: 15 minutes. Working time: 30 minutes. Solids: 71%. VOC's: 376 g/l. Use to install: ActionBac®, Jute, Latex Unitary, Waffle, and Rubber Back.

Coverage: 13-14 square yards per gallon

In Stock: Gallon
 3.5 Gallon

Item: C-19



PS 100: Trowel Grade Pressure Sensitive Adhesive

PS 100 trowel grade pressure sensitive adhesive installs the widest range of flooring types and as such is our best multipurpose flooring adhesive. Features include: ten year performance warranty, installs the broadest range of flooring materials, can be used for either permanent or releasable applications, permanently pressure sensitive, extended working time, and easy to trowel. Open time; 15 minutes. Working time: 24 hours. Solids: 50%. VOC's: 0. Use to install: Carpet (all types) and carpet tiles, solid vinyl sheet and tile, felt backed vinyl sheet flooring, rubber tile and synthetic carpet pad.

Coverage: 18-19 square yards per gallon

In Stock: Gallon
 4 Gallon

Item: C-PS100



022: Commercial Seam Sealer

#022 Solvent Based, Flammable Carpet Seam Sealer is specially formulated to prevent edge raveling and seal seams of most commercial and outdoor carpets. #022 is fast setting and waterproof. #022 is compatible with most carpet backings. Excellent for direct glue and double glue applications. Open time: 0 minutes. For use with: ActionBac®, Jute, Latex Unitary, Wovens, Rubber Backed and Urethane (attached cushion).


In Stock: 8 oz.
Quart
Item: C-22



029: Flammable Pad Cement

029 Solvent Based, Flammable Carpet Pad Cement is specially formulated to quickly and to permanently bond most residential and commercial carpet padding. It is fast setting and waterproof and allows for stretching of carpet cushion wrinkling and slippage. Open time: 10 minutes. For use with the following types of pad: Rebond Urethane, Prime Urethane, Frothed Urethane, Sponge Rubber, Foam Rubber, Hair & Jute and Synthetic Hair & Jute.

In Stock: Gallon
Item: C-29

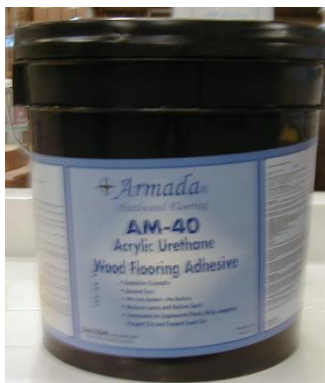

Armada® AM-40 Acrylic Urethane Wood Flooring Adhesive

Armada® AM-40 was developed with the installer in mind. It was designed specifically for gluing down most engineered plank, strip and pre-finished parquet floors including foam backed parquet. Armada® AM-40 is approved for gluing down felt back moisture barrier (slip sheets).

Coverage: 40 square feet per gallon
In Stock: 4 Gallon
Item: AM-40



AM-2580 Trowel & Coverage Information

-For 5/16" solids and engineered plank less than 3/8" use 1/8" x 1/8" x 1/8" square notch. Bolick Item # G4PRB-U. Coverage: 55-65 sf/gal

-For engineered plank 3/8" to 9/16" thick and less than 5" wide and 1/2" solids use 3/16" x 3/16" x 3/16" square notch. Bolick Item # G4MLN-U. Coverage: 35-40 sf/gal.

-For engineered plank 5" or wider and 3/4" solids use 1/4" x 1/4" x 1/4" square notch. Bolick Item # TG9CTB. Coverage: 25-30 sf/gal.

-For parquet wood tile use 3/32" x 3/32" x 3/32" square notch. Bolick Item # G4PRC-U. Coverage: 70-80 sf/gal.

Armada® AM-2580 Moisture Cure Urethane Wood Floor Adhesive

AM- Wood Flooring Adhesive has been formulated to meet all the installer's needs. It trowels as easily as a water-based adhesive. It bonds extremely well to all sub-floor types. It grabs fast, with excellent green strength, to prevent boards from slipping in the wet adhesive. It has extremely strong shear and tensile strength, but remains elastic and elongates to prevent breaking the bond to the sub-floor. This is a very important feature in today's wood flooring market, as there are an endless number of exotic species that are very popular. The strong shear and tensile strength combined with the elongation make it the perfect adhesive to accommodate the exotic woods that expand and contract substantially with changes in humidity.

Coverage: 25-80 square feet per gallon (depends on trowel size & wood thickness)

In Stock: 4 Gallon

Item: AM-2580



ST100

ST100 is a latex based adhesive specially formulated for vinyl plank and tile.

Coverage: 165 sf per gallon

In Stock: 1 Gallon

5 Gallon

Item: ST100 1GAL

ST100 4GAL



TA 380: Thin Spread VCT Adhesive

TA 380 Thin Spread Vinyl Composition Tile Adhesive is the installer's choice for VCT installations. TA 380 sets firm reducing tile slippage. Features include: five year performance warranty, clear adhesive so chalk lines remain visible, no unsightly residue between tile, and 24 hour working time. Open Time: 30-60 minutes. Working time: 24 hours. Solids: 51%. VOC's: 0. Use to install: Vinyl Composition Tile (3/32" and 1/8").

Coverage: 160-170 square feet per gallon

In Stock: Gallon

4 Gallon

Item: C-380



TA 480: Thin Spread VCT Adhesive

TA 480 Thin Spread Vinyl Composition Tile Adhesive is our power performer for VCT installations. TA 480's unique formula makes it suitable for use even over old cutback adhesive residue. Features include: translucent formula so chalk lines remain visible, install over old asphalt cutback adhesive, zero VOC's calculated and 24 hour working time. Open Time: 15 minutes. Working time: 24 hours. Solids: 53%. VOC's: 0. Use to install: Vinyl Composition Tile.

Coverage: 160-170 square feet per gallon

In Stock: Gallon
4 Gallon

Item: C-480



CB 005 Acrylic Latex Cove Base Adhesive

CB 005 Acrylic Latex Cove Base Adhesive's acrylic formulation provides a strong, firm setting bond for years of trouble-free performance. Features include: strong early grab for corner wrapping, white formulation means easier cleanup, strong impact resistant bond, and resists shrinkage. Open Time: 0 minutes. Working time: 45 minutes. Solids 65%. VOC's: 0. Use to Install: vinyl or rubber cove base, cork wall tile and wall carpet.

Coverage: 120 lf per tube
240 lf per gallon

In Stock: 30 oz cartridge
Gallon
4 Gallon

Item: C-C5



TackBond Construction Adhesive

TackBond Construction Adhesive is a very fast drying gun grade construction adhesive available in 30-ounce tubes. TackBond's fast drying performance makes it the ideal product for the installation of tackstrip on concrete surfaces. No longer will you have to predrill endless holes for concrete nails. Simply run out a 1/4" bead of TackBond on the floor, place the strip into the adhesive, pull strip back out to flash the adhesive for a minimum of 5 minutes, reinsert tackstrip and let dry for 4-6 hours. TackBond's rapid bond development will then allow full-power stretching without coming loose from the floor. It's the perfect choice for tackstrip installation and many other construction-related applications including the installation of reducer strips and thresholds, stair treads, metal moldings and trim, ceramic tile fixtures and repairs.

Coverage: 80-120 lineal feet of tackstrip (depending on width of the strip)

In Stock: 30.5 oz. Tubes

Item: C-TB30



028: Flammable Contact Cement

028 Flammable Neoprene-based contact cement is a high-performance solvent cement for practically any application, especially plastic laminates. It is excellent for industrial and residential use. 028 is waterproof and heat-resistant. Its viscosity allows it to be brushed, rolled or sprayed. (Open time: 15 minutes - 4 hours) Application Recommendations:

- Brush, Roller or Industrial Sprayer
- Plastic Laminates, Plywood, Particle Board, Hardboard, Carpet Stair Tread, Tackless Strip, Metal & Plastic Molding and Cove Base

In Stock: Quart

Gallon

Item: C-28Q

C-28G



K-20 Premium 4" Seam Tape

The industry's best selling 4" seaming tape. Strengthened with a knitted reinforced fiberglass scrim. Use for light to medium residential carpet installations.

In Stock: 66 lf rolls

Item: OK-20S



K-40 Supreme 4" Seam Tape

This 4" seam tape is designed specifically for carpets with ActionBac®. Premium adhesive and tough knitted scrim. Use for medium commercial and heavy residential carpet installations.

In Stock: 66 lf rolls

Item: OK-40S



Super 3SB Wide 6" Seam Tape

Reduces seam peaking and increases seam strength. Adhesive available in flat or beaded. Use for heavy commercial and heavy residential carpet installations.

In Stock: 66 lf rolls

Item: OSUPER 6"




No. 100-LR 100 lb. Roller – 5 ¼" diameter

All steel, trouble free construction guarantees a lifetime of maintenance free service. Steel will not crack or chip as cast iron can. Nothing can go wrong with solid steel roller sections-no bushing of any sort to come loose. Added to this is the famous Gundlach craftsmanship which is applied throughout to all details of construction. Used on: Linoleum, vinyl sheet goods, rubber tile, vinyl tile, cork tile, wood block tile, roofing systems and waterproofing membranes.

In Stock: 100 lb. roller

Item: G100-LR

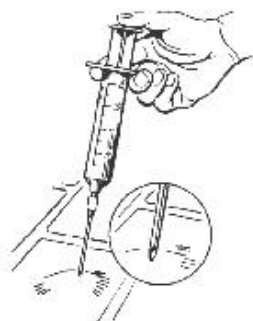

No. 143 Adhesive Syringe

Solves air bubble problems quickly. For glue down carpet trouble spots and vinyl sheet goods. Hollow point tapered needle is 13 gauge x 2" long and delivers adhesive with an invisible puncture. Adhesive capacity is 2 oz. Economically priced.

In Stock: Adhesive Syringe

Item: G143



No. 166 Duckbill Napping Shears

These shears feature offset handles which makes level nap trimming easy. Shears are made from hot forged cutlery steel with a special duckbill blade for precise cuts. Nickel plated and polished, the handles also have a red vinyl coating for comfort. The No. 166 Shears has 1" knuckle room finger loops for thumb and forefinger control. The overall length is 6" and the length of cut is 1 5/8".

In Stock: Duckbill Napping Shears

Item: G166



No. 177 Carpet Shears

Entirely made in the U.S.A., these shears are hot hammer forged of high integrity cutlery steel, hardened and tempered for durability and long life. Shears are plated for superior protection against rust and corrosion. Unconditional lifetime warranty against defective materials or workmanship. Light gauge shears for napping cuts. Overall length is 7 ½" and length of cut is 2-1/8".

In Stock: Carpet Shears

Item: G177



No. 350-2W White Rubber Mallet

Widely used by carpet layers and ceramic tile setters. This top quality brand quality brand provides longer service than lower cost, lesser quality models. Has sturdy contoured hardwood handle. Face diameter: 2 ¼". Head length: 3 ¾". Handle length: 11 1/8". Head weight: 20 ozs.

In Stock: White Rubber Mallet

Item: G350-2W




No. 214 Carpet Kicker

The most valuable feature is the pin depth adjustment mechanism. The 16 pins can be dialed to 16 settings in 1/32" increments to adjust for pile heights and desired penetration. When desirable to use the three nap grip inserts, the pins can be completely retracted. The nap grips are used on lightweight or low pile carpets. The length of the kicker is adjustable in five positive lock settings from 17 ½" to 21 ½". The comfortable seamless foam filled bumper pad can be switched to four positions for even wear distribution. A snap-on plastic pin cover is supplied to protect the pins when not in use. Black powder coat finish. Instructions and an illustrated parts list is included.

In Stock: Carpet Kicker

Item: G214

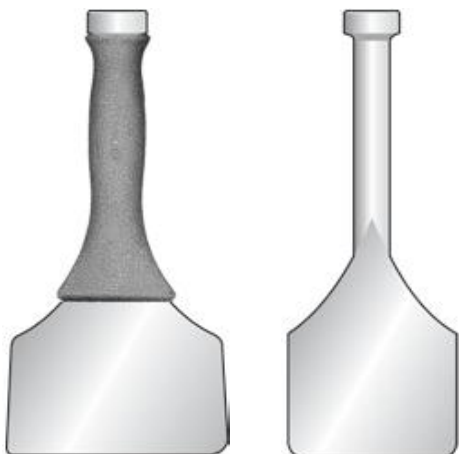

No. 261 & 262 Straight Stair Tools

Used for tucking carpet into the tackless strip/wall gully and to drive carpet into a stair crotch. Both are forged from tough chisel type alloy steel, and are bright nickel plated to resist rust and corrosion. Blades are ground to the correct smooth slim taper, and oversize heads resist hammer damage. Both are 8" long. Two blade widths are available.

In Stock: Straight Stair Tools
Item: G261
G262



No. 400-CS Junior Power Carpet Stretcher

Features a 14 1/2" wide metal pin plate that holds 59 rust resistant nickel plated pins for heavy duty work. Pin depth is adjusted by a knob conveniently located on top of the head. One head handles all weights of carpet. The lightweight cast aluminum head is angled at the rear of both sides to allow side kicking. The 14 1/4" wide tail block has a nonmarring rubber pad and glides in any direction on two each 1" ball type casters. Supplied with a sturdy steel carrying case that has storage capacity for six tubing sections in the lid. Minimum operating length is 34 1/2", and opens to 22' with four tubing sections. More tubing can be added for longer stretches. Supplied complete with an adjustable 14" Transfer Tube, Head Assembly, Tail Block Assembly, Case and four each No. 402-TS Tubing sections with exclusive one-piece spring clips, guaranteed for life against breakage. Weighs 61 lbs.

In Stock: Carpet Stretcher
Item: G400-CS



No. 57-ML Moulding Lifter

This tool gives positive leverage control to avoid denting the baseboard. It is also specially designed to lift the moulding at approximately the same angle that the nails were driven. The smoothly ground slim ends enter easily under the mouldings, and both are notched for nail and brad pulling. The top grade tool steel is hardened and tempered for maximum toughness. Finished with a rust proof bright nickel plating. Weighs 1/2 lb. and is 10 1/2" long.

In Stock: Moulding Lifter
Item: G57-ML




No. H-76 12" Tile Cutter With Casters

Cuts clean edges on all types of resilient floor tile—even solid vinyl tile, a material too tough for other cutters. Also cuts asphalt (without preheating), vinyl composition, rubber, cork, linoleum, felt-backed vinyl, marble translucent vinyl, and marble chip epoxy tiles. Expertly designed to give the trade the fastest, most convenient and the most durable cutter available.

In Stock: Tile Cutter

Item #: GH-76-1

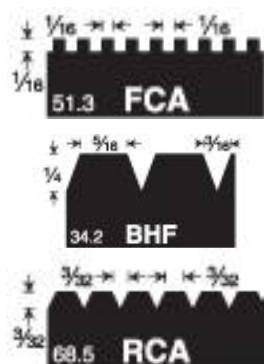

No. 4(notch)-U Professional Trowel

This trowel has a 4½" wide x 10½" long blade made from a good grade of tempered carbon steel.

In Stock: 1/16" x 1/16" x 1/16" Square-notch (FCA)

3/32" x 3/32" x 3/32" V-Notch (RCA)

¼" x 5/16" x 3/16" V-Notch (BHF)

Item: G4FCA-PRO VINYL VCT

G4RCA-PRO CARPET

G4BHF-PRO WOOD PLANK



No. 716 Conventional Back Carpet Trimmer

Cuts in either direction and has a three position adjustable throat feature for carpets of varying pile height. Cutting height adjustments are made by using any of seven 1/167" thick shims. It is not necessary to remove shims to adjust throat depth. The metal handle is vinyl coated for comfort and has five working positions, including a horizontal position for working under toe spaces. Trimmer is supplied with five Universal Trimmer Blades and a plastic strip for mounting on the stainless steel angled wall runner to prevent wall marking.

Other steel parts of trimmer are plated for rust prevention.

In Stock: Carpet Trimmer

Item: G716

Action Knife For Slotted Blades

Patented D-Ring for easy blade change. Quick front loading blade changes. The professional craftsman's choice.

In Stock: Action Knife

Item: O-215





Utility Knife for 3 Notch Blade

Patented D-Ring for easy blade change. Unique design for superior blade retention. Use with both conventional and heavy duty utility blades.

In Stock: Utility Knife

Item: O-216



Personna® Blades

In stock:

Item

Description

A610017

Slotted Blades Round Corners 100 Pack

A610023

Slotted Blades Square Corners 100 Pack

A610021

Trimmer Blades 100 Pack

A610027

4" Scraper Blades 10 Pack

A610072

4" Scraper Blades 100 Pack

A610029

Utility Blades (3 notch) 100 Pack

A610032

8" Scraper Blades 10 Pack



No. 790 4" Replaceable Blade Scrapers

This heavy-duty scraper is widely used for a variety of floor, wall and countertop work. It is especially useful for removing sponge carpet backing. The angled blade holding heads, plus the razor sharp blades provide "clean shaving" cutting action. Each scraper has a comfortable vinyl hand grip and three case hardened screws to resist slot wear and give maximum blade holding power. The No. 790 is the 18" long scraper for tougher jobs. Supplied with one blade, installed backwards for safety.

In Stock: 4" Replaceable Blade Scrapers

Item: G790



No. 375 8" Replaceable Blade Scrapers

Scrape faster and with less work because you can always have a razor sharp blade. Length on both models is adjustable for maximum comfort – kneeling or standing. Adjustment is quick and easy. Not recommended for heavy duty prying floor removal work. Supplied with one blade, installed backwards for safety. No. 375 – long big scraper, adjustable from 39" – 59".

In Stock: Replaceable Blade Scrapers

Item: G375





No. 812 Super Saw Kit

This completely redesigned super saw has the most features and power available of any undercutting saw. The 13 AMP motor and 6 1/2" diameter flush-cutting blade can fully undercut inside corners even in areas with as little as 12" clearance, like small closets. Doors as thick as 1 3/4" can be undercut without removal. Blade height is adjustable from a flush cut to a maximum of 1/4" off the floor. Super Saw Kit includes Nos. 805 masonry blade, 821 carbide tipped steel blade, saw, plastic carrying case and hex wrench.

In stock: Super Saw Kit
Carbide Tipped Steel Blade
Masonry Blade

Item: G820
TG821
TG805



Seam Irons

Available in two sizes, wide and standard. Both feature:

- Deep center groove welds carpet edges together
- Non stick Teflon® base minimizes smoke and odor
- Three-way cord guide keeps cord out of the way
- Two year factory warranty
- Lowest profile design in the industry for superior maneuverability
- Kool Top® heat shield prevents delamination and distortion caused by heat.
- Exclusive full length fin uniformly guides iron under the carpet

In Stock: Kool Top® Standard Seaming Iron
Kool Top® Wide Seaming Iron


Item: OKT-FG110
OKTW-110 WIDE



Sanding Discs

In Stock:

<u>Item</u>	<u>Description</u>
FC16T-15	15" Coarse 4 Grit Sanding Disc
FC16T-16	16" Coarse 4 Grit Sanding Disc

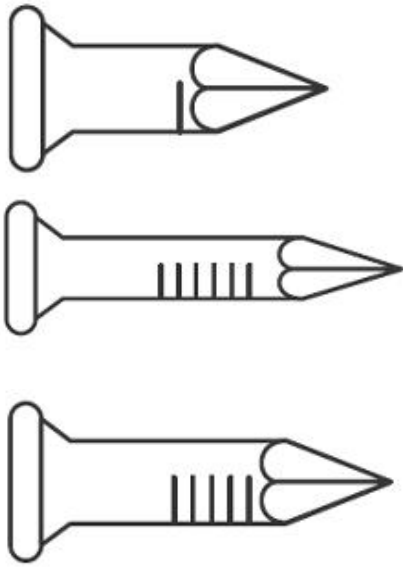

Concrete Nails

These tough and hardened nails resist bending. They are used extensively by carpet installers where the condition of the aggregate permits. They have a countersunk head style. The ½" and 5/8" sizes are 10 gauge and have a 17/64" head diameter. The 11/16" size, which is ordinarily used in pre-nailed tackless strip, is 12 gauge and has 7/32" head diameter.

In Stock:

<u>Item</u>	<u>Description</u>
H-1/2 ONE	1 lb. bag 10 Gauge ½" Concrete Nails
H-1/2 FIVE	5 lb. bag 10 Gauge ½" Concrete Nails
H-11/16 ONE	1 lb. bag 12 Gauge 11/16" Concrete Nails
H-11/16 FIVE	5 lb. bag 12 Gauge 11/16" Concrete Nails
H-5/8 ONE	1 lb. bag 10 Gauge 5/8" Concrete Nails
H-5/8 FIVE	5 lb. bag 10 Gauge 5/8" Concrete Nails

Tack Strip

In Stock:

<u>Item</u>	<u>Description</u>
HG-120	Wood Tack Strip 400 lf/box
HG-140	Concrete Tack Strip 400 lf/box



Tape

In Stock:

<u>Item</u>	<u>Description</u>
NNP320B	Brown Pad Tape 2" x 60 Yards



Duo-Fast™ Electric Tacker

Heavy-duty installer choice. Precision made, professional model.

In Stock:	Electric Stapler
	Staples
Item:	DFENC5418
	DF5418C Duo-Fast™ 9/16" Staples



No. GB-1 Chalk Line Reel

This chalk line reel features a slotted, self-sealing rubber grommet for easy filling. Simply insert the nozzle of an 8 oz. Bottle and squeeze for quick and clean filling. Non-breakable plastic case is lightweight. Spun polyester line is 100' long and has a hook ring. The line has the tough strength of nylon and the chalk holding capacity of cotton. This model has a positive line locking mechanism. The No. GB-1 has self-lubricating nylon gears that allow rewinding 3 to 4 times faster than regular reels. Simple finger pressure applied to the handle permits free-wheeling for the line going out without the handle turning.

In Stock: Chalk Line Reel

Item: GGB-1 100 FT



Ultra-Fine Chalk Powder

A specially formulated blend of talcum powder and limestone is milled to a finer consistency for more positive and distinct marking. Available in an 8 oz squeeze bottle with an easy fill spout. Cap color indicates chalk color. *Caution: blue and red chalk contains a dye that may stain some carpets.*

In Stock: 8 oz. Red Chalk
8 oz. White Chalk
8 oz. Blue Chalk


Item: G8-R
G8-W
G8-B

Metal Trims

In Stock:



<u>Item</u>	<u>Description</u>
AJ-12 HAMMERED	1 ½" Flat Silver
AJ-12 HAMMERED G	1 ½" Flat Gold
AJ-30 HAMMERED	1" Flat Silver
AJ-30 HAMMERED G	1" Flat Gold
AJ-14 HAMMERED	Pinless Silver – for glue down
AJ-14 HAMMERED G	Pinless Gold – for glue down
CM-1680 GOLD	Z Metal 12' – Carpet to Ceramic
CM-1680 SILVER	Z Metal 12' – Carpet to Ceramic
RF154H	Economy Silver with teeth ½" lip
RF154HG	Economy Gold with teeth ½" lip
SA-BLANKBARHTX	Silver E-Trim
SA-BLANKBARSBH	Gold E-Trim
SA3704HTX	Silver with teeth ¾" lip
SA3704SBH	Gold with teeth ¾" lip
SA3706 SILVER	Flexible with teeth
SA3706 GOLD	Flexible with teeth
SA3751	Track metal for vinyl insert with teeth
SA3752	Track metal for vinyl insert pinless
SA399 SILVER	Silver stair nosing
SA399 SATIN	Gold stair nosing
SZ-BAR	4 FT use with tackstrip – metal does not show

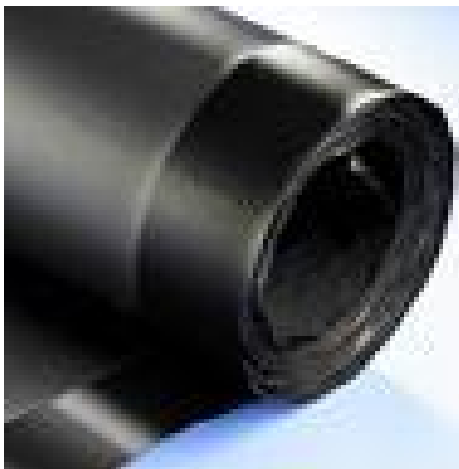

Armada® Silent Treatment

Silent Treatment® is XLPE TPO foam with a 2 mil moisture barrier and attached lip and tape for easy installation. To have the most quiet laminate floor available today, choose Silent Treatment® Underlayment. Silent Treatment® is a premium sound suppressant underlayment that will make your laminate floor installation so quiet that you'll swear you're walking on solid hardwood. Silent Treatment® not only reduces noise but is non-allergenic, mold and mildew resistant and is manufactured from recycled materials making it earth friendly. Silent Treatment® also comes with lip and tape on the edges. All seams can be sealed to provide the ultimate moisture protection for your flooring installation. Sound Transmission Loss. The sound-insulating property of a partition element is expressed in terms of the sound transmission loss. ASTM E90-02, ASTM E413-87 Sound Transmission Class (STC) = 72.

Impact Sound Transmission. The method is designed to measure the impact sound transmission performance of a floor-ceiling assembly in a controlled laboratory environment. ASTM E492-90, ASTM E989-89 Impact Insulation Class (IIC) = 72.

In Stock: Silent Treatment®
Item: AM-SILENT TREAT



Solid Walk

SolidWalk™ fiber pad underlayment has a polyethylene film moisture barrier, lip (overlap) and tape. This product features an overlapping moisture barrier and tape for ease of installation. Sound Transmission Loss. The sound-insulating property of a partition element is expressed in terms of the sound transmission loss. ASTM E90-97, ASTM E413-87 Sound Transmission Class (STC) = 54. Impact Sound Transmission. The method is designed to measure the impact sound transmission performance of a floor-ceiling assembly in a controlled laboratory environment. ASTM E492-90, ASTM E989-89 Impact Insulation Class (IIC) = 58.

In Stock: Solid Walk 100 sf & 360 sf
Item: AM-SOLIDWALK 100
AM-SOLIDWALK 360



Sound Barrier Plus

SOLID SOUND™ Standard 3 in 1 Underlayment comes with 3 mil overlapping moisture barrier film and pressure sensitive adhesive lip. Our 3 in 1 product is our top selling underlayment and is unsurpassed in quality, durability, ease of installation and sound solidification. 3 in 1 underlayment is primarily used on a concrete sub-flooring or where the threat of moisture exist.

In Stock: Sound Barrier Plus 100 sf
Item: AM-SOUNDBARRIER

Bolick Distributors Company History

Bolick Distributors was founded in 1959 by Gene and Ruth Anne Bolick. In the early years, Bolick Distributors sold only wall tile but soon expanded from the back of Gene Bolick's station wagon to an 8,000 square foot warehouse located in Baton Rouge, Louisiana. During the 1960's, Gene added additional products to compliment the original wall tile offering. Among the additions, were ceramic tile, carpet, cushion and supplies. The business flourished and over time more product lines and locations were added to support growth, including the continued expansion of warehouse space in Baton Rouge.

Now, as the company's 50th anniversary in business approaches, Bolick Distributors has grown into one of the largest multilocation wholesale floor covering distributors in the Gulf South. From 3 company owned facilities and 2 service partner facilities, representing in excess of 150,000 square feet of warehouse space, Bolick Distributors offers convenient will call service and operates a fleet of delivery trucks that reaches more than 2500 customers. Our business philosophy of today remains consistent with the simple operating principle that Bolick Distributors was built on - to offer our customers high quality products at competitive prices with reliable customer service.

In 1998, Interior Building Supply, Corp. purchased the company from Gene Bolick. The new ownership group has maintained the name Bolick Distributors as an on going tribute to the founders of the business and to our many loyal customers who identify with the level of trust and integrity that the Bolick name represents. We give you our pledge to build on close to 50 years of experience by continuing to invest in better business systems, improve our customer service performance, and to nurture the employee culture that makes doing business with Bolick Distributors something special.



Bolick Distributors

2055 N. Airway Dr.

Baton Rouge, LA 70815

Phone: 225-927-8016

Toll Free: 800-960-1209

Fax: 225-927-0120

Website: www.bolick-distributors.com

E-mail: info@bolick-distributors.com

Order: order@bolick-distributors.com



*Wholesale Distributors of Quality
Residential & Commercial Floor Coverings*

Branch & Service Locations

5736 Blessey St.

Harahan, LA 70123

Phone: 504-734-8175

Fax: 504-734-7120

7028-A US Hwy. 49 N.

Hattiesburg, MS 39402

Phone: 601-268-9001

Fax: 601-261-9007

6130 Linwood Ave.

Shreveport, LA 71106

Phone: 318-938-7815

Fax: 318-865-1804

300 Philips St.

North Little Rock, AR 72117

Phone: 501-945-0662

Fax: 501-945-0803